



US009284022B2

(12) **United States Patent**
Johnson

(10) **Patent No.:** **US 9,284,022 B2**
(45) **Date of Patent:** **Mar. 15, 2016**

(54) **MOTORBOAT WITH WIND SHROUD**

(71) Applicant: **Keith Norman Johnson**, Conway, SC (US)

(72) Inventor: **Keith Norman Johnson**, Conway, SC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **14/182,052**

(22) Filed: **Feb. 17, 2014**

(65) **Prior Publication Data**
US 2014/0311399 A1 Oct. 23, 2014

Related U.S. Application Data

(60) Provisional application No. 61/805,392, filed on Mar. 26, 2013.

(51) **Int. Cl.**
B63B 17/02 (2006.01)

(52) **U.S. Cl.**
CPC **B63B 17/02** (2013.01)

(58) **Field of Classification Search**

CPC .. A41D 13/085; B63H 21/265; B63H 21/213; B62J 23/00

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,333,872 A * 3/1920 Overton 2/17
1,825,240 A * 9/1931 Miller 440/63

* cited by examiner


Primary Examiner — Edwin Swinehart

(74) *Attorney, Agent, or Firm* — Moore & Van Allen PLLC; W. Kevin Ransom

(57) **ABSTRACT**

Embodiments of the invention are directed to a boat motor assembly which includes a boat motor with a housing that serves as the body or chassis of the boat motor; a handle, coupled to and extending at length from the housing and configured to be grasped by a user; and a shroud assembly, which includes a shroud extension coupled to the handle extending at length from the handle; and a shroud coupled to the shroud extension, wherein the shroud is spaced apart from the housing to allow access to the handle between the shroud and the housing.

19 Claims, 14 Drawing Sheets

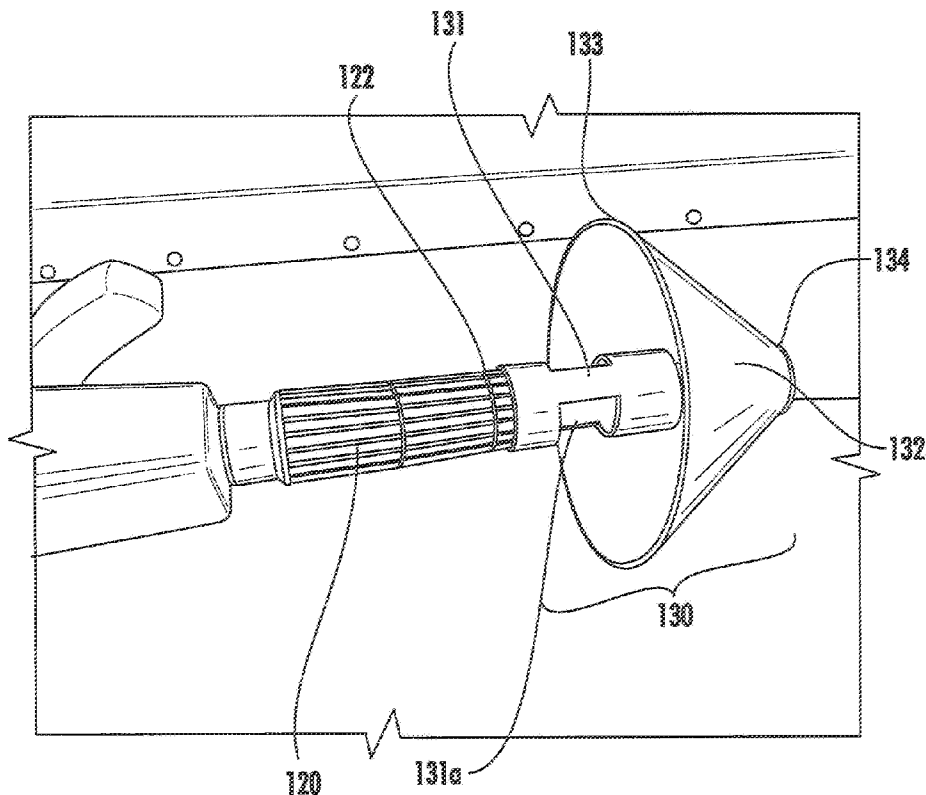

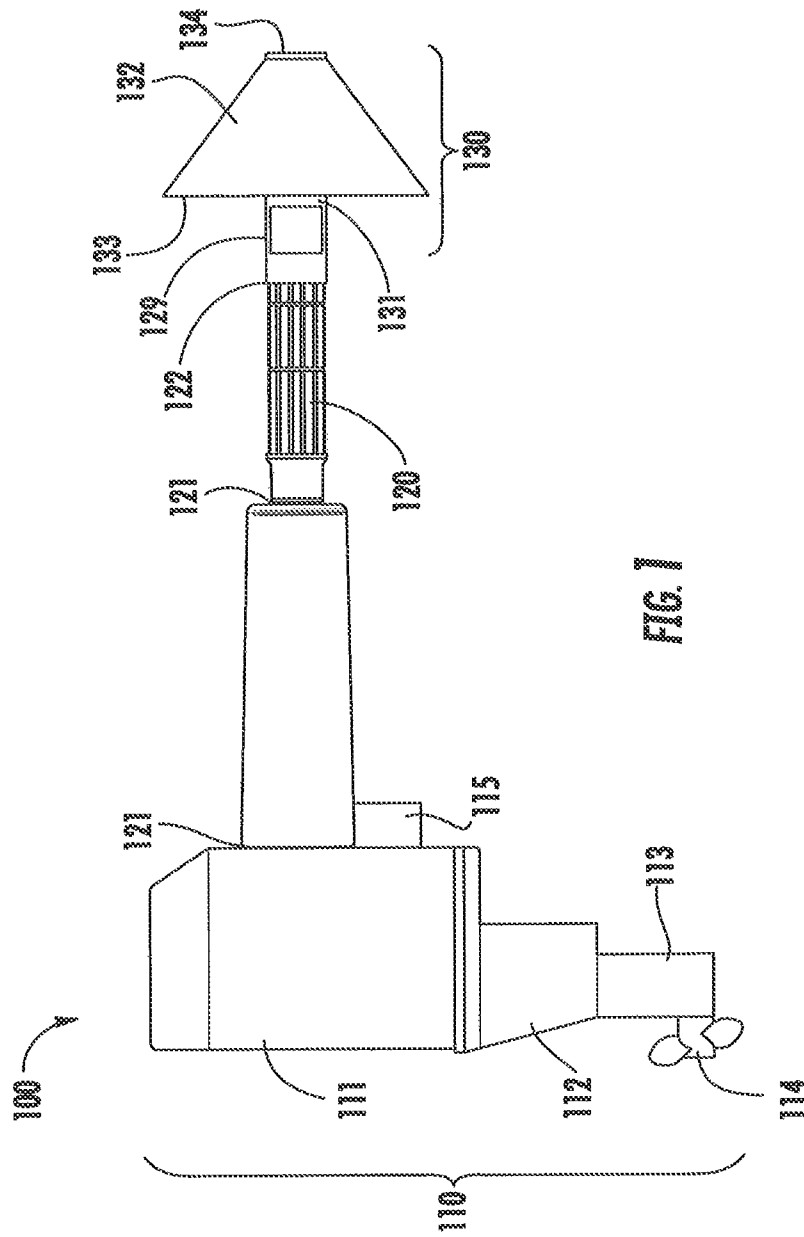
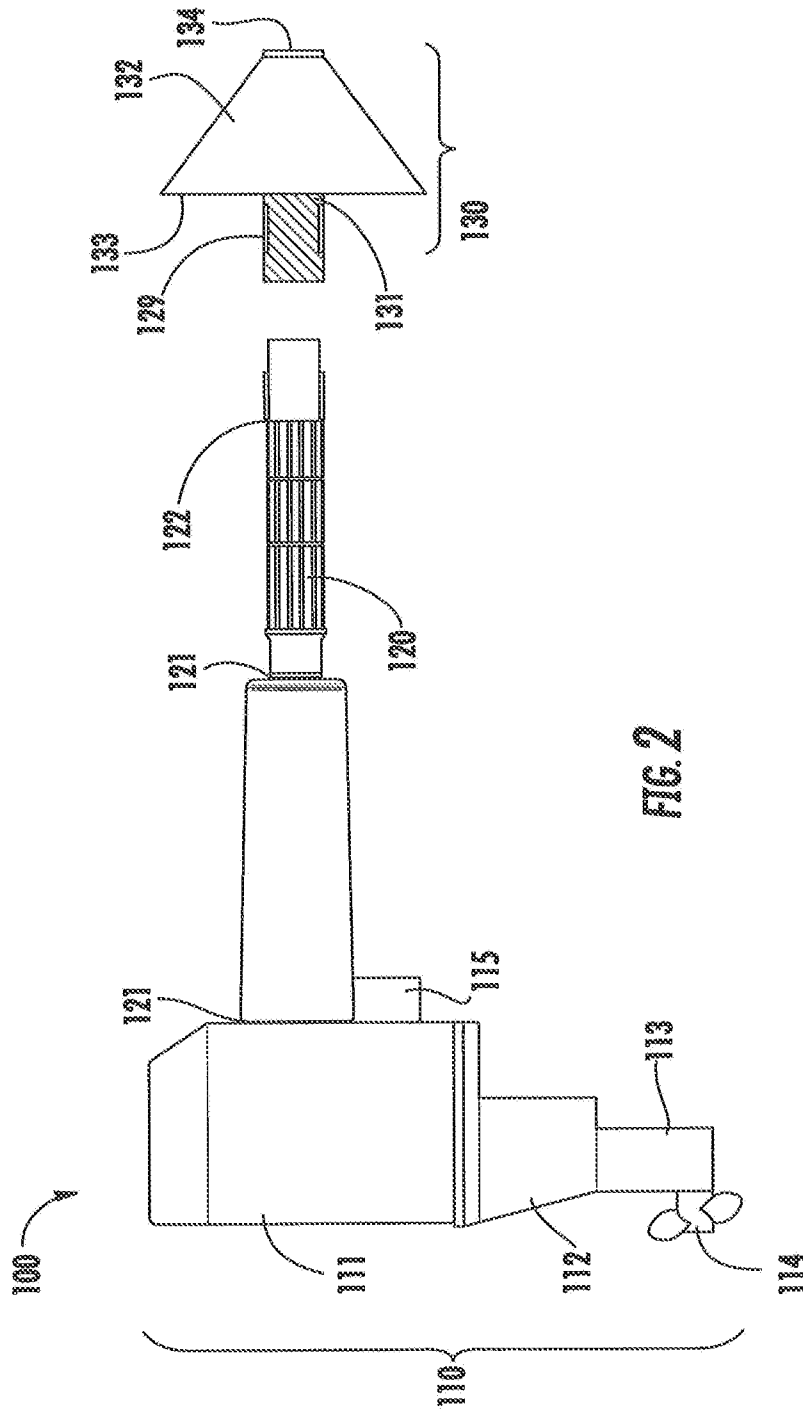
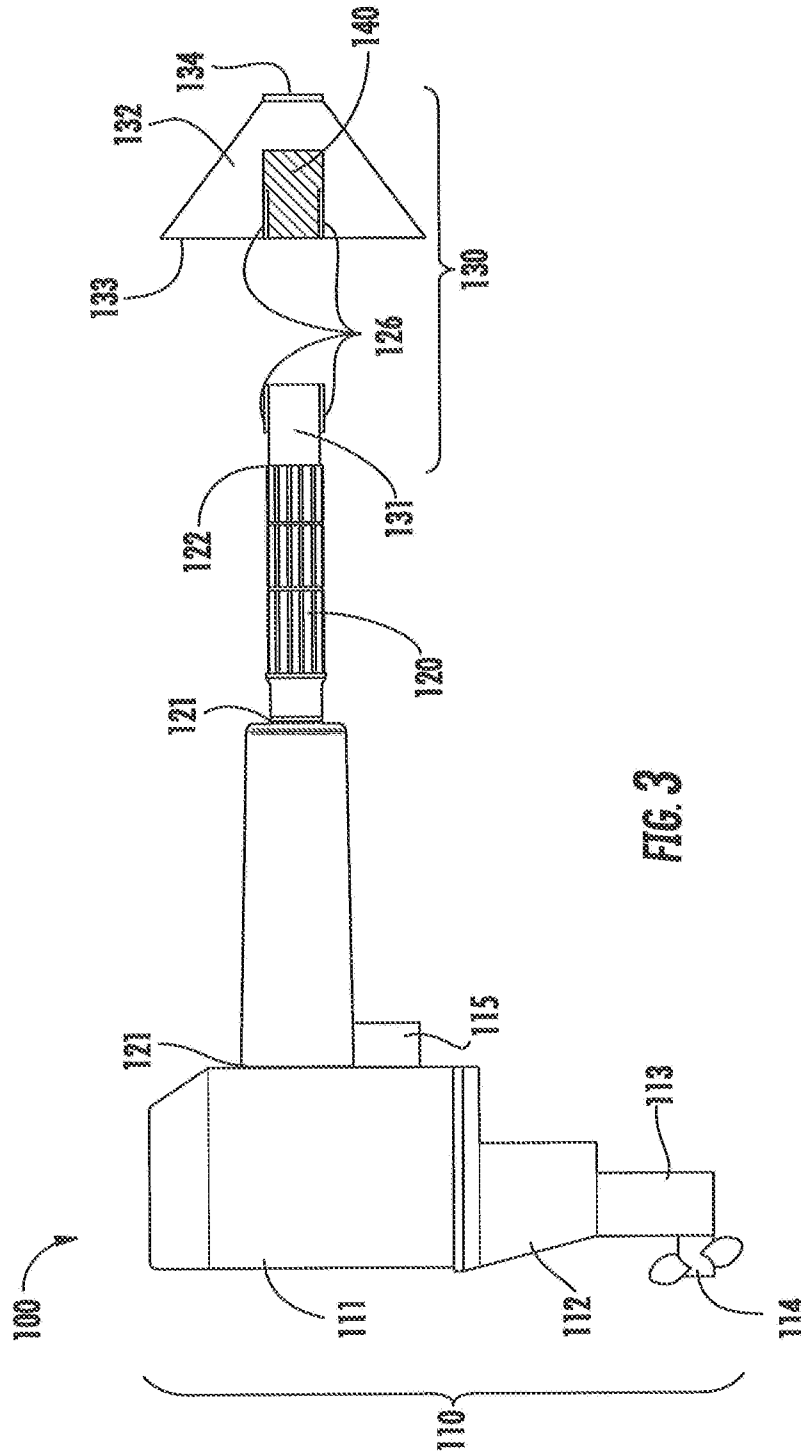
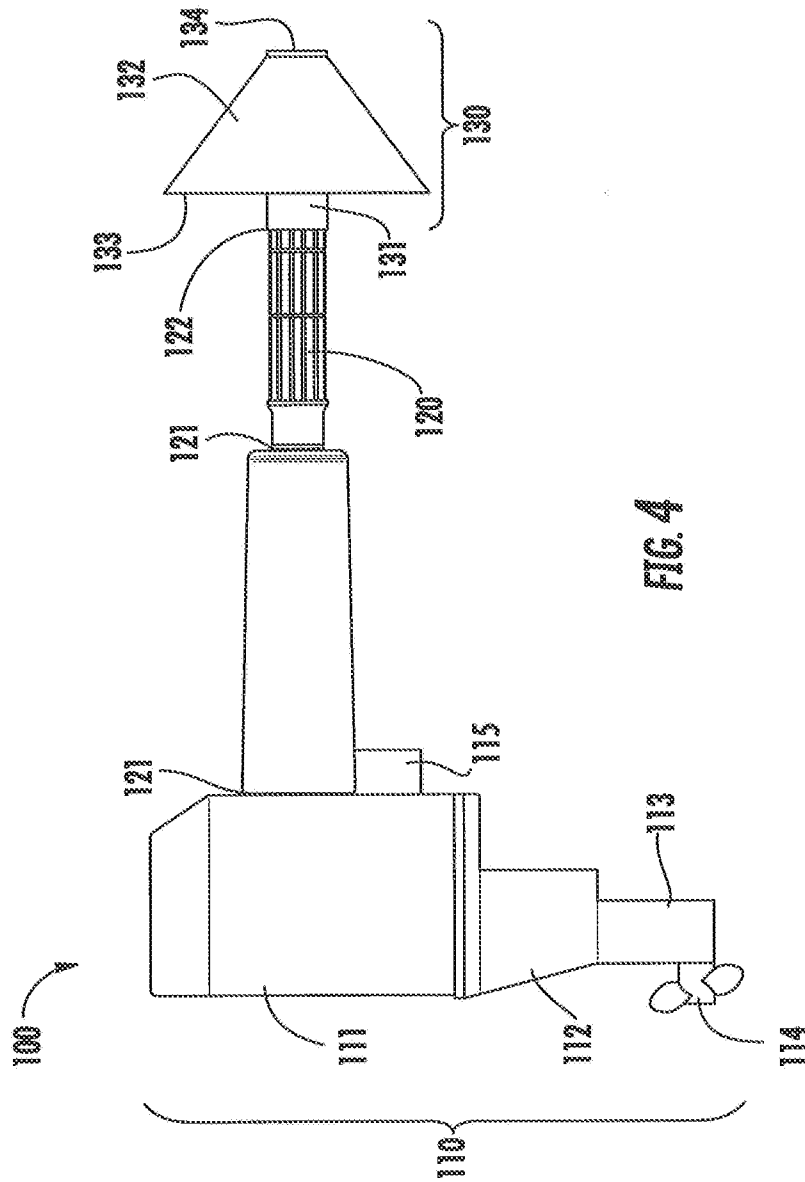


FIG. 1







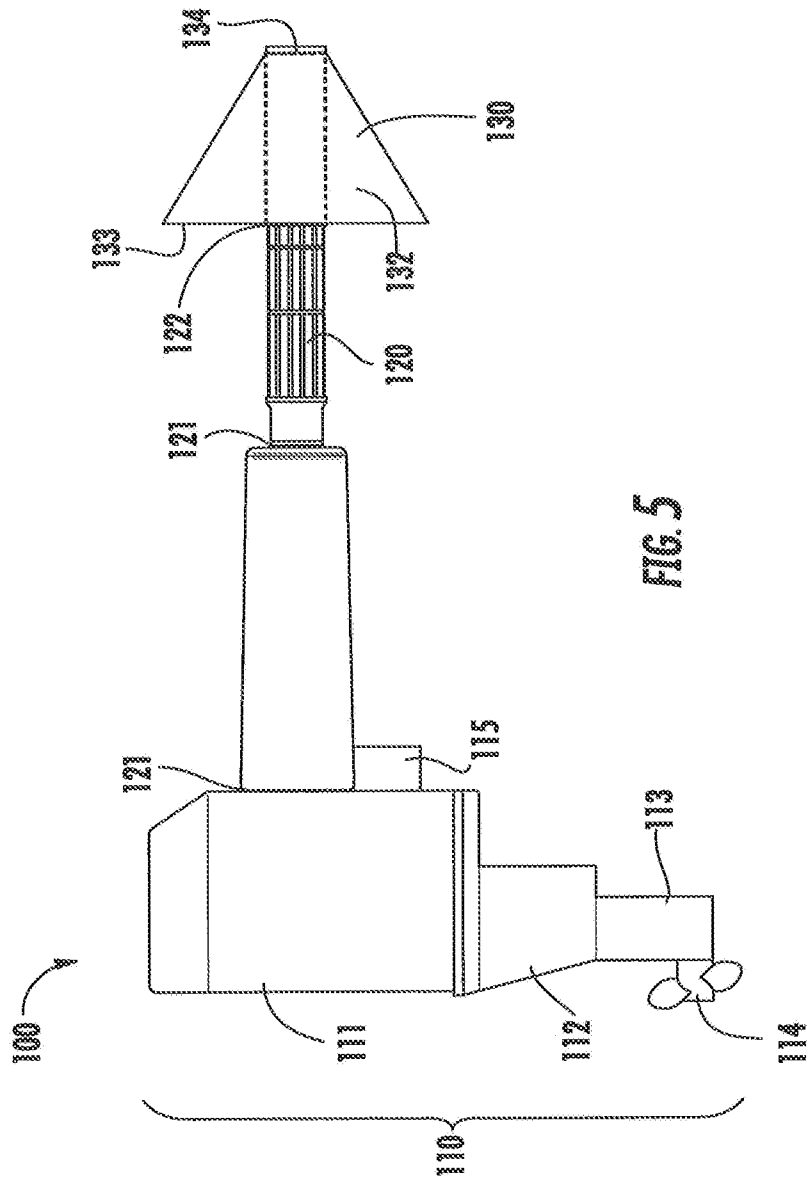
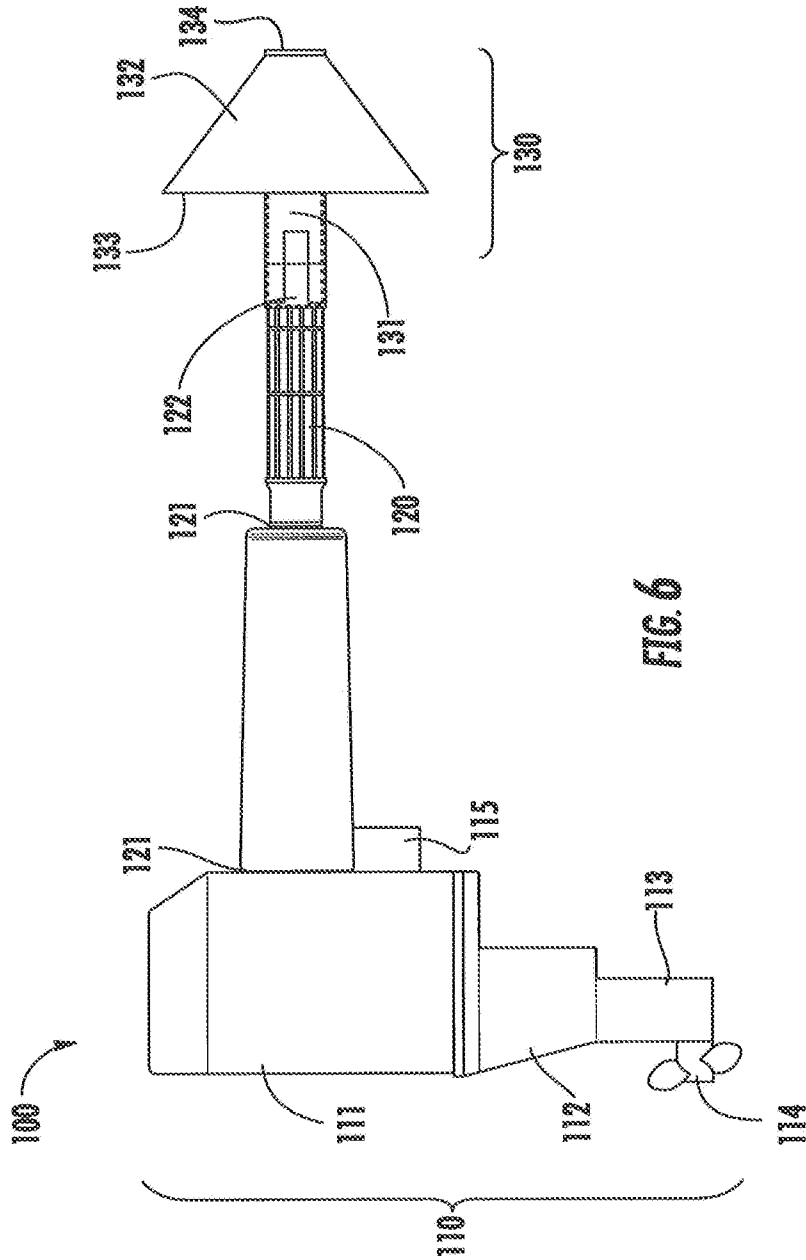


FIG. 5



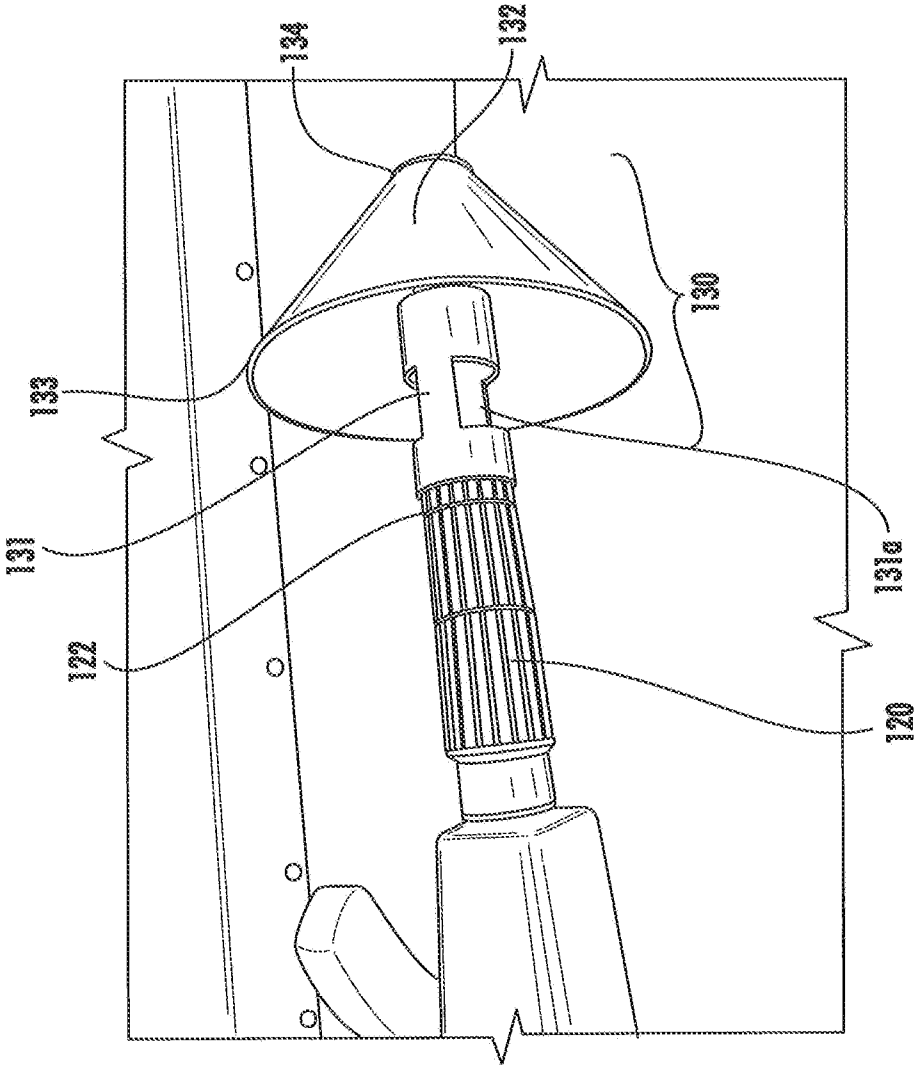


FIG. 7

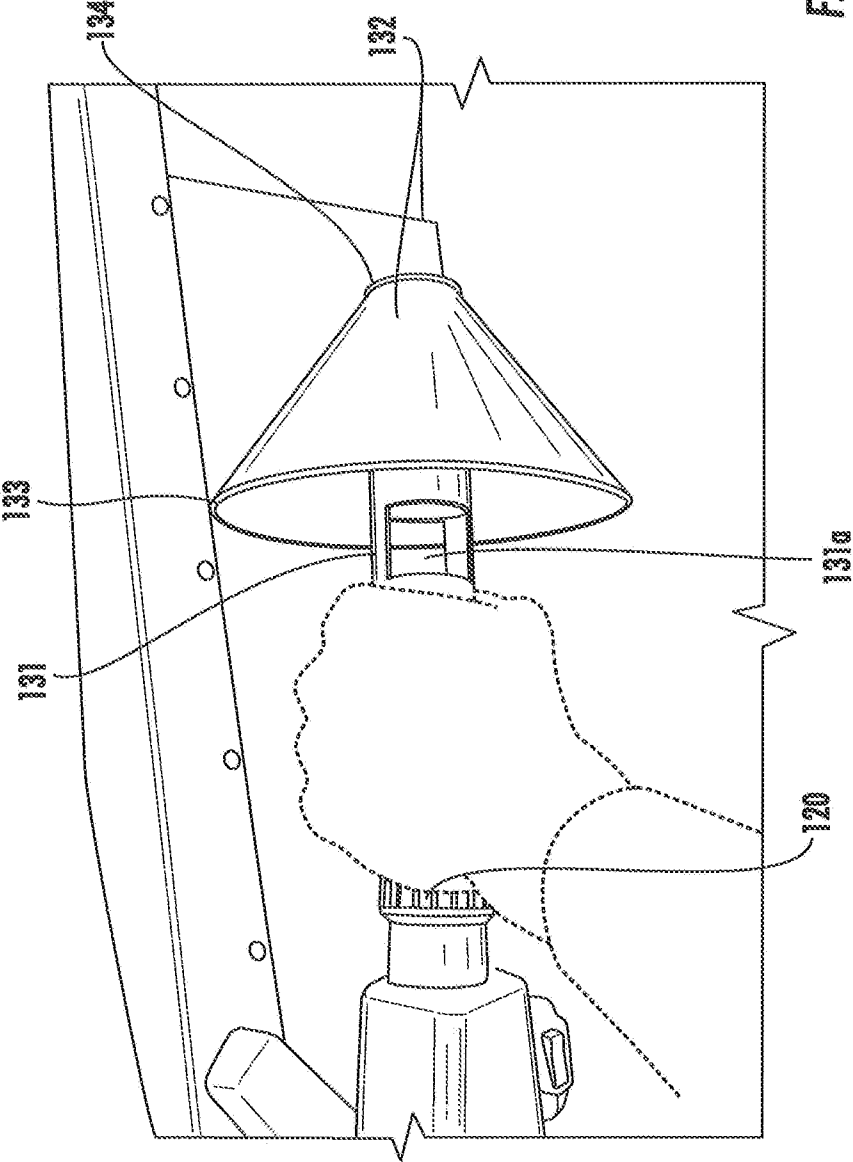
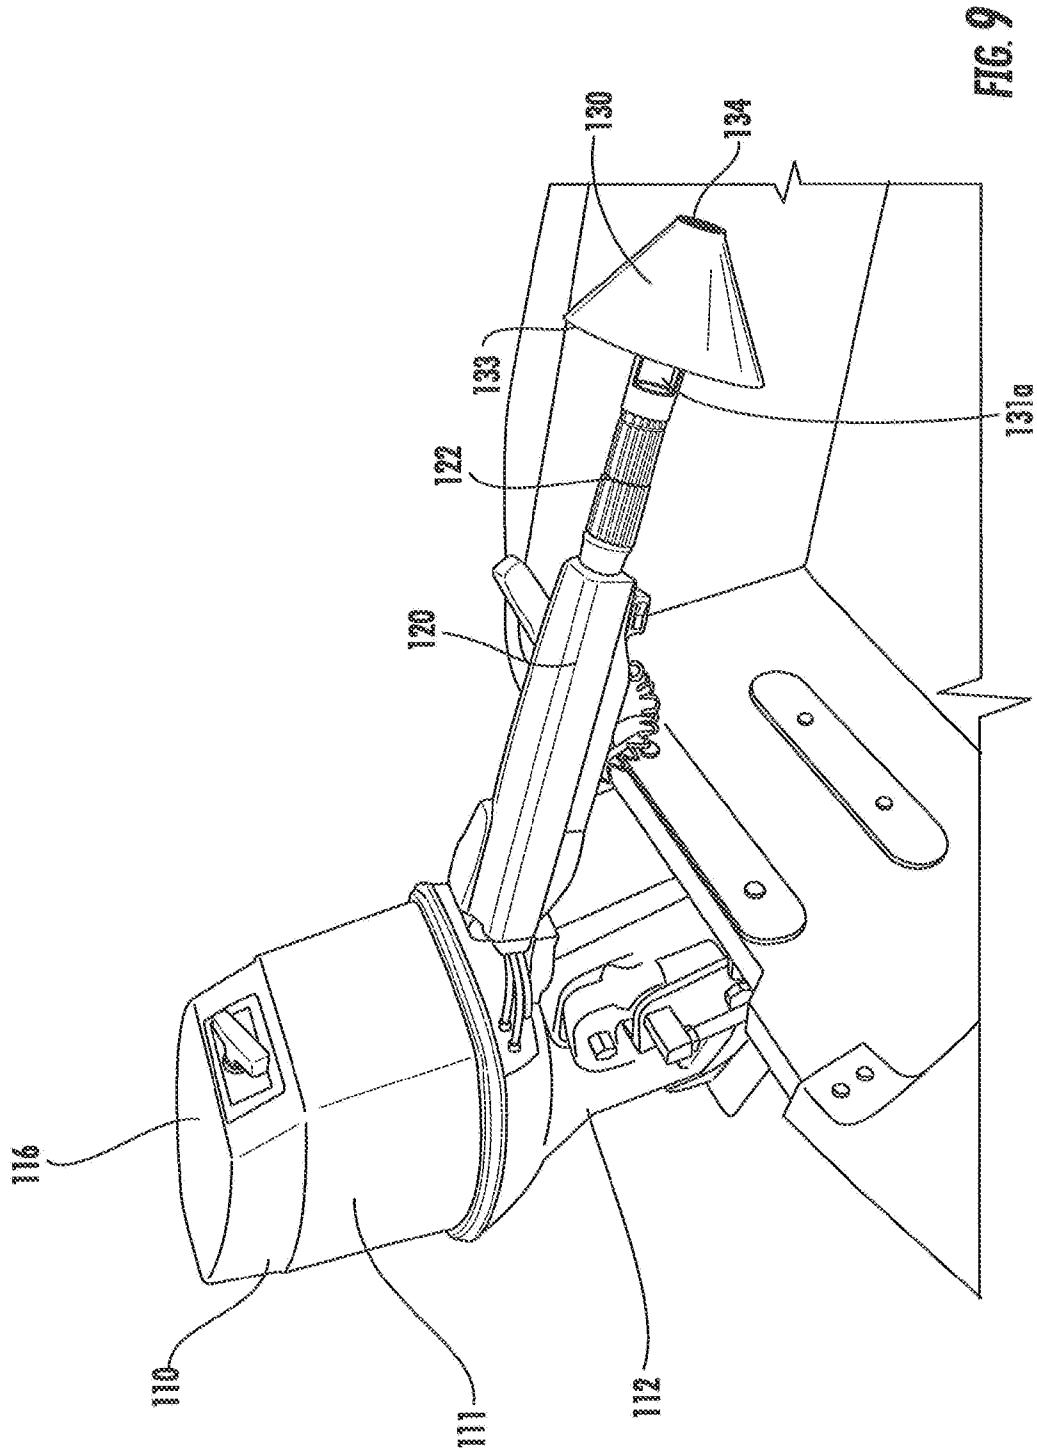


FIG. 8



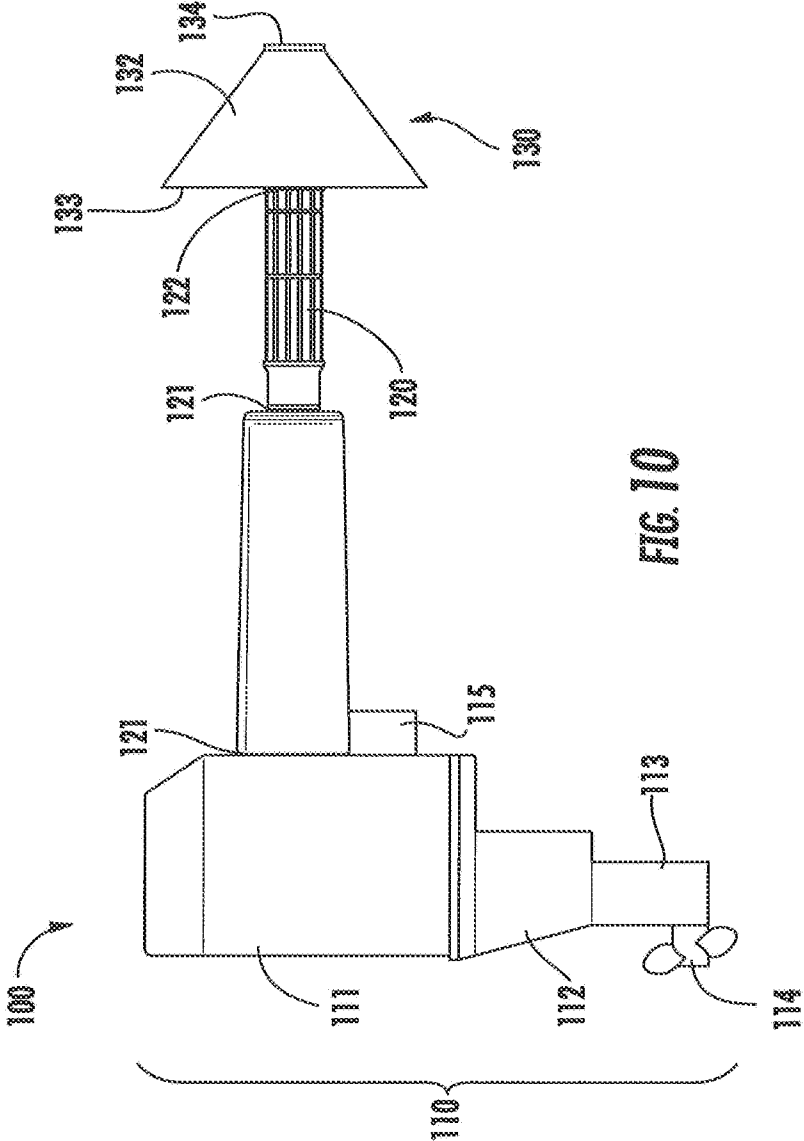


FIG. 10

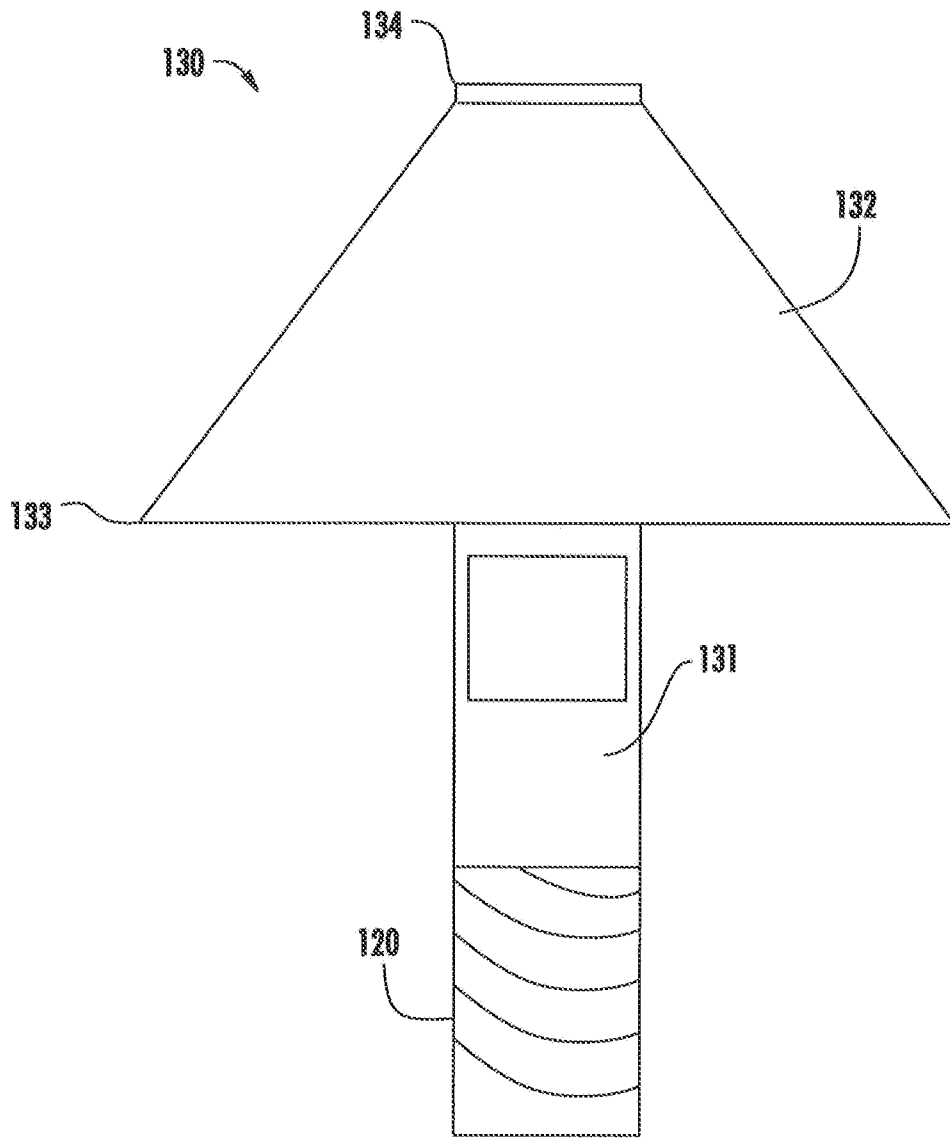


FIG. 11

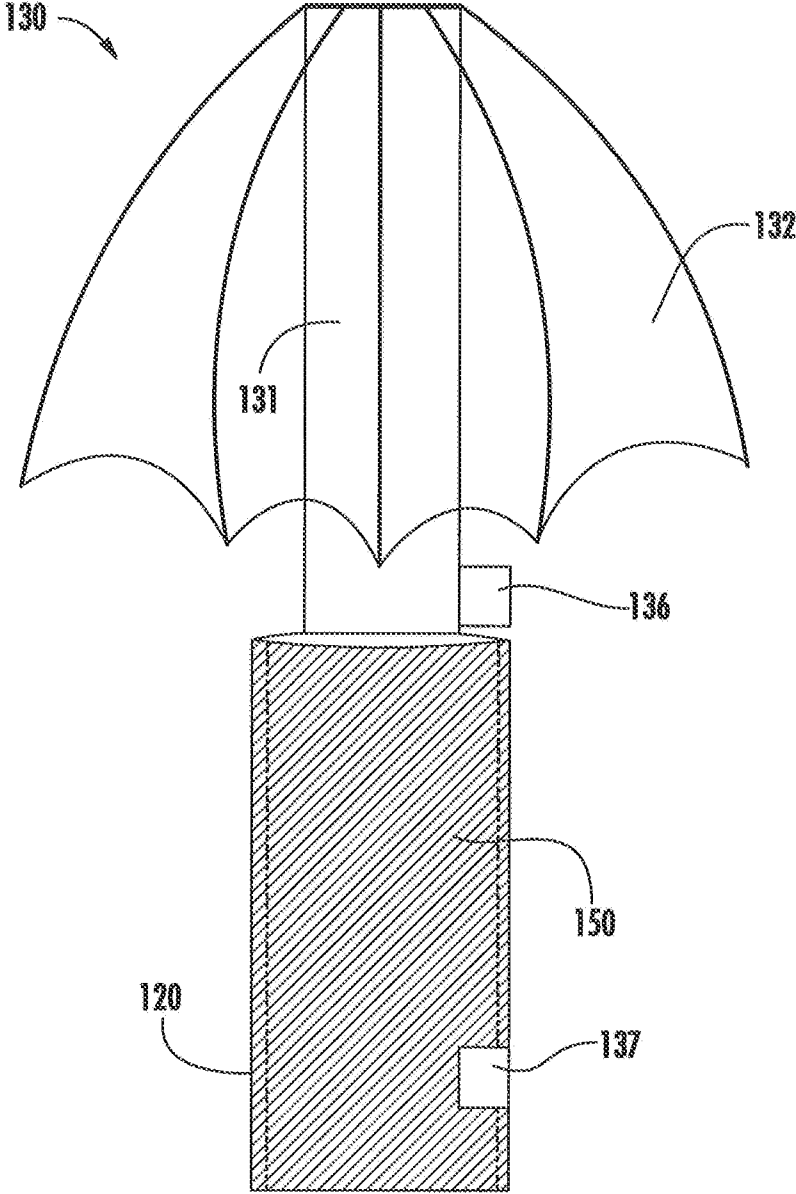


FIG. 12

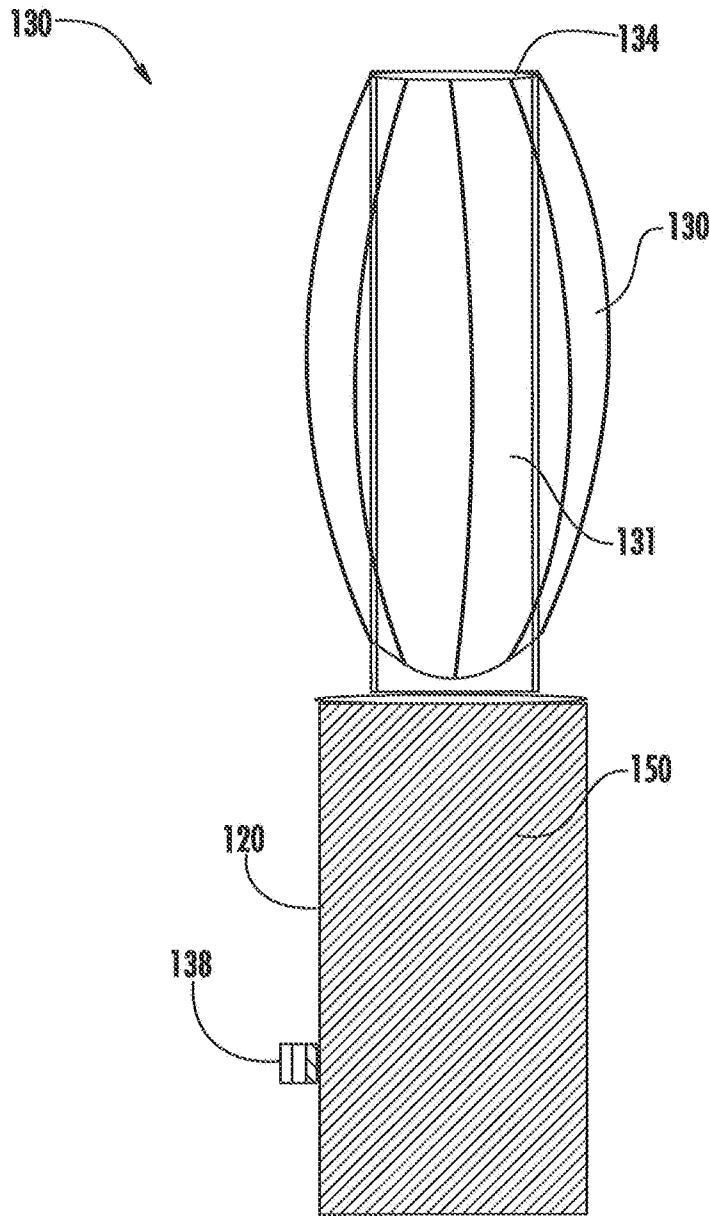


FIG. 13

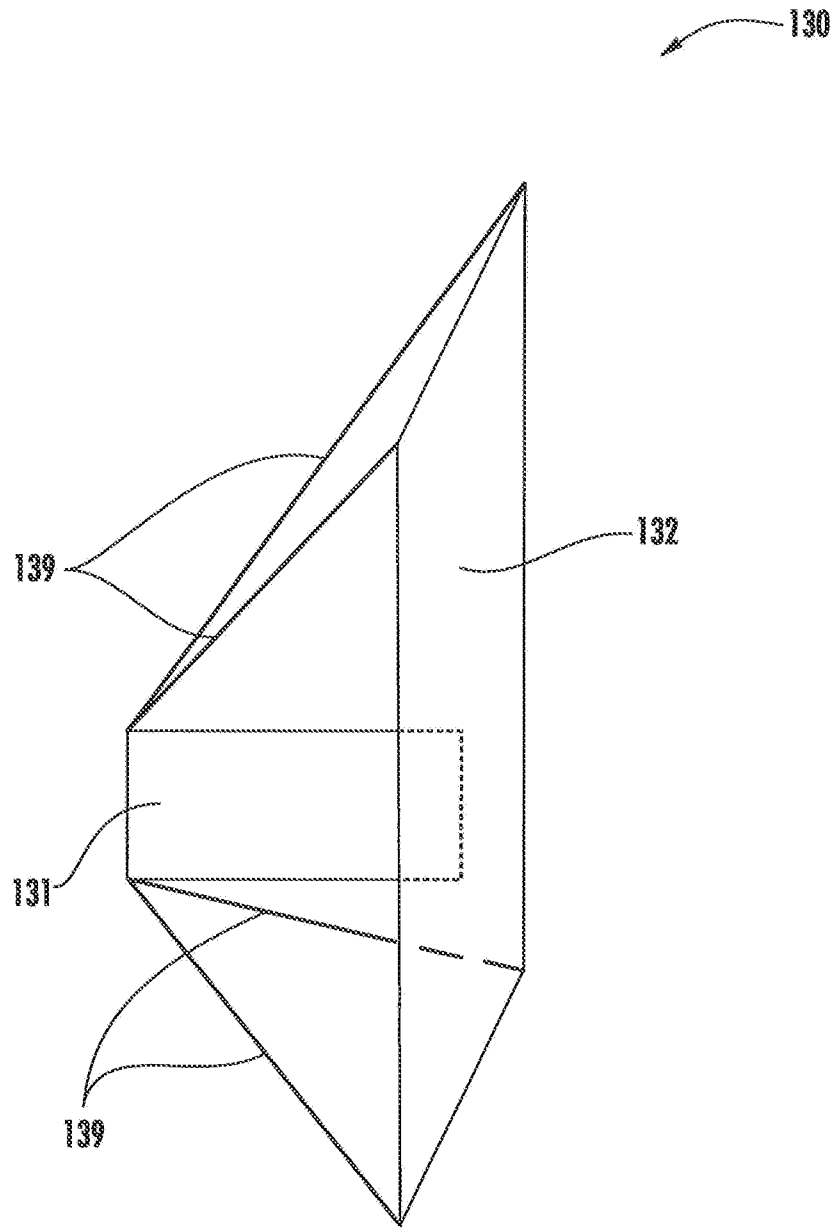


FIG. 14

MOTORBOAT WITH WIND SHROUD**CROSS REFERENCES TO OTHER RELATED APPLICATIONS**

This application claims priority from and is a non-provisional patent application of U.S. Provisional Patent Application No. 61/805,392, filed on Mar. 26, 2013, and entitled "Motorboat with Wind Shroud," the contents of which are hereby incorporated by reference in their entirety.

BACKGROUND

When operating a motorboat under windy or hard weather conditions, there is a need to protect one's hand at the motorboat's tiller as best as possible.

BRIEF SUMMARY

In one aspect, the present invention is directed to a boat motor assembly that includes: a housing that includes a boat motor, a handle coupled to and extending at length from the housing and configured to be grasped by a user, and a shroud assembly. The shroud assembly typically includes a shroud extension and a shroud. The shroud extension is typically coupled to the handle. The shroud is typically coupled to the shroud extension and spaced apart from the housing so as to allow access to the handle between the shroud and the housing.

In some embodiments, the handle defines a width, the shroud extension defining a width of at least the width of the handle.

In some embodiments, the handle defines a proximal portion and a distal portion relative to the housing, and wherein the shroud extension is permanently coupled to the distal portion of the handle.

In some embodiments, the handle defines a proximal portion and a distal portion relative to the housing, and wherein the shroud extension is detachably coupled to the distal portion of the handle.

In some embodiments, the handle defines a proximal portion and a distal portion relative to the housing, and wherein the shroud extension is rotatably coupled to the distal portion of the handle.

In some embodiments, the shroud is a conic attachment from the shroud extension.

In some embodiments, the conic attachment defines a first perimeter and a second perimeter around the perimeter defined by the shroud extension.

In some embodiments, the second perimeter of the conic attachment is less than the first perimeter of the conic attachment.

In some embodiments, the shroud is permanently coupled to the shroud extension.

In some embodiments, the shroud is detachably coupled to the shroud extension.

In some embodiments, the shroud is retractable.

In some embodiments, the shroud assembly is retractable into a cavity defined by the handle.

In some embodiments, the shroud assembly is mechanized with a motor to retract into the cavity defined by the handle.

In some embodiments, the shroud is collapsible.

In some embodiments, the shroud is collapsible on the surface defined by the shroud extension.

In some embodiments, the shroud is mechanized with a motor to collapse on the surface of the shroud extension.

In some embodiments, the shroud defines a stiff surface formed from a rigid material.

In some embodiments, the shroud comprises a flexible surface formed from a flexible material.

5 In some embodiments, a boat motor assembly is provided. The assembly comprises: a boat motor; a housing defining a cavity, wherein the boat motor is positioned in the cavity, wherein the housing has a handle extending at length from the housing, the handle being configured to be grasped by a user. 10 a shroud assembly comprising; a shroud extension, wherein the extension is detachably coupled to the handle and extends at length from the handle; and a shroud, wherein the shroud is coupled to the extension, wherein the shroud is spaced apart from the housing to allow access to the handle between the shroud and the housing, wherein the shroud comprises a conic attachment, the conic attachment defining a first perimeter and a second perimeter around the perimeter defined by the shroud extension, the second perimeter of the conic attachment being less than the first perimeter of the conic attachment, the shroud defining a stiff surface formed from a rigid material.

15 In some embodiments, a boat motor assembly is provided. The assembly comprises: a boat motor; a housing defining a cavity, wherein the boat motor is positioned in the cavity, wherein the housing has a handle extending at length from the housing, the handle being configured to be grasped by a user; and a shroud, wherein the shroud is detachably coupled to the handle, wherein the shroud is spaced apart from the housing to allow access to the handle between the shroud and the housing, wherein the shroud comprises a conic attachment, the conic attachment defines a first perimeter and a second perimeter around the perimeter defined by the shroud extension, the second perimeter of the conic attachment being less than the first perimeter of the conic attachment, the shroud defining a stiff surface formed from a rigid material.

BRIEF DESCRIPTION OF THE DRAWINGS

Having now described embodiments of the invention in general terms, reference will now be made to the accompanying drawings, where:

FIG. 1 depicts a side view rendering of a prototype for a boat motor assembly with a shroud assembly, in accordance with embodiments of the invention;

FIG. 2 depicts a side view rendering of a prototype for a boat motor assembly with a detachable shroud assembly, in accordance with embodiments of the invention;

50 FIG. 3 depicts a side view rendering of a prototype for a boat motor assembly with a shroud assembly, with the shroud being detachable from the shroud extension, in accordance with embodiments of the invention;

FIG. 4 depicts a side view rendering of a prototype for a boat motor assembly with a shroud assembly, the shroud partially extending over the length of the shroud extension, in accordance with embodiments of the invention;

FIG. 5 depicts a side view rendering of a prototype for a boat motor assembly with a shroud assembly, the shroud completely extending over the length of the shroud extension, in accordance with embodiments of the invention;

FIG. 6 depicts a side view rendering of a prototype for a boat motor assembly with a shroud assembly, the shroud extension partially enclosing the perimeter of the handle, in accordance with embodiments of the invention;

FIG. 7 photographically depicts a prototype for a shroud assembly, in accordance with embodiments of the invention;

FIG. 8 photographically depicts a prototype for a shroud assembly being grasped by a user, in accordance with embodiments of the invention;

FIG. 9 photographically depicts a boat motor assembly and a prototype for a shroud assembly, in accordance with

FIG. 10 depicts a side view of a boat motor assembly and a prototype for a shroud with no shroud extension, in accordance with the embodiments of the invention;

FIG. 11 schematically illustrates a side view rendering of a prototype for a shroud assembly, wherein the shroud extension is capable of being rotatably coupled to the handle, in accordance with embodiments of the invention;

FIG. 12 schematically illustrates a side view rendering of a prototype for a shroud assembly capable of being retracted into a handle cavity, in accordance with embodiments of the invention;

FIG. 13 schematically illustrates a side view rendering of a prototype for a shroud assembly, wherein the shroud is capable of being collapsed on the surface defined by the shroud extension, in accordance with embodiments of the invention; and

FIG. 14 schematically illustrates a side view rendering of a prototype for a shroud that is a planar surface, in accordance with embodiments of the invention.

DETAILED DESCRIPTION OF EMBODIMENTS OF THE INVENTION

Embodiments of the present invention now may be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all embodiments of the invention are shown. Indeed, the invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure may satisfy applicable legal requirements. Like numbers refer to like elements throughout.

In one aspect, the present invention embraces a shroud assembly as an attachment for a boat motor assembly to help protect the user's hands from harsh weather conditions during operation.

A "user" as used herein may operate the present invention. The user may be defined as any person interacting with the present invention.

As used herein, a "vessel" may be described as a watercraft or structure, used or capable of being used as a means of transportation or habitation on the water. In some embodiments, a vessel may be a land vehicle. In some embodiments, a vessel may be an amphibious vehicle capable of transportation or habitation on both land and water.

As used herein, a "motorboat" may refer to a speedboat, powerboat, or any other type of boat powered by a boat motor assembly. In some embodiments, a boat motor may refer to an outboard motor, inboard motor, a stern drive motor, a jet drive motor, or the like. In some embodiments, the boat motor assembly may be permanently mounted or installed in the vessel. In some other embodiments, the boat motor assembly may be detachably mounted or installed in the vessel. A boat motor assembly, when mounted or installed in a vessel may render the vessel a motorboat for the duration of the installation. Vessels that qualify to be classified in this category may include canoes, inflatable vessels, dinghies and the like.

FIGS. 1 through 9 depict a boat motor assembly in accordance with the present invention. The boat motor assembly typically includes a boat motor **110**, a handle **120**, and a shroud assembly **130**. Typically, a housing **116** serves as the

body or the chassis of the boat motor **110**, as shown in FIG. 9. Typically, the housing is manufactured from a stiff material, such as a metal, a metal alloy, a plastic, a plastic composite, carbon fiber, a ceramic, or the like. In some embodiments, the boat motor **110** may include an upper section **111**, a middle section **112**, and a lower section **113**.

The upper section **111** (or the power-head) generally includes an engine that is used to power the vessel. In some embodiments, the engine may be a reciprocating engine, a diesel engine, a pulse jet engine, external combustion engine, or any other type of engine. In some other embodiments, the engine may refer to an internal combustion engine. In alternative embodiments the engine may refer to an external combustion engine. Typically, the engine is powered by energy-dense fuels such as gasoline, diesel, or liquid derived from fossil fuels. In some embodiments, the engine may be replaced by an electric motor, powered by direct current sources (e.g., batteries, rectifiers), or alternating current sources (e.g., inverters). Typically, the boat motor **110** uses an ignition system to ignite the fuel in the engine. In some embodiments, the boat motor **110** may use a mechanical ignition system. In some other embodiments, the boat motor **110** may use an electronic ignition system. In alternative embodiments, the boat motor **110** may use a distributorless ignition system. Typically, the upper section **111** includes a handle **120** for steering and a thrust lever attached to the handle **120** to regulate the speed of the engine. In some aspects, the handle **120** may refer to a wheel, a rudder, a helm, a tiller, or any other type of steering assembly.

Typically, the middle section **112** (or drive shaft housing) extends downward below the power-head. The drive shaft housing may include an exhaust system associated with the engine. The lower section **113** includes a transmission and houses a propulsion shaft that drives the propeller **114**. In some embodiments, the lower section **113** may include a transmission to transfer power from the drive shaft to the propeller **114**. Typically, the transmission is a forward/neutral/reverse type transmission. This type of transmission may enable the vessel to function in at least one of the forward/neutral/reverse operational states. Accordingly, the transmission may define the driving condition of the propeller **114**. In some embodiments, the propeller **114** may be replaced by any other known or suitable propulsion device. For example, the propulsion device, without limitation, could be a jet pump unit.

In some embodiments, the boat motor assembly **110** may be coupled to the vessel using a clamp **115**, a bolt, brackets, or the like as shown in FIGS. 1 through 9. In other embodiments, the boat motor assembly **100** may be coupled to the vessel using a combination of couplings. The construction of the boat motor **110** as thus far described may be considered to be conventional; therefore, further description of the boat motor **110** is not believed to be necessary. In typical embodiments, a user may grasp with his or her hand the handle **120** coupled to the boat motor assembly **100** to operate the boat motor (e.g., as depicted in FIG. 8). A thrust lever with a twist grip acceleration control may be attached with the handle **120** to not only steer the vessel but also to regulate the speed of the engine. The handle **120** typically defines a length, width, and perimeter. As depicted in FIGS. 1 through 9, the handle **120** may define a proximal portion **121** and a distal portion **122** relative to the boat motor **110**. In some embodiments, the portion (e.g., the distal portion **122**) of the handle **120** designated to be grasped by the user may include a textured surface to ensure a non-sliding grip throughout the operation. An example of a textured surface may include a rough coating on the handle **120** to avoid slipping on the hand during operation.

In some embodiments, the handle **120** may include grooves or grips **129** for the user's fingers to grasp the handle **120** as shown in FIG. 1.

When steering the vessel using the handle **120**, the user may expose his or her hand to harsh weather conditions, including low temperatures, wind, rain, snow, sleet, ice, or the like for the entirety of the time that the user is operating the boat motor **110**. If the user is not wearing gloves, mittens, or any other type of hand protection while operating the boat motor **110**, the effects of the harsh weather conditions may be magnified. Accordingly, the boat motor assembly **100** typically includes a shroud assembly **130** for protecting the user's hand from harsh or extreme weather conditions when steering the vessel. For example, if the user is steering the vessel at high speeds during weather conditions with cold rain and strong wind, the user's hand grasping the handle **120** may be protected from harsh elements by a shroud (e.g., a protective shield) that breaks the wind and rain before they reach the user's hand.

In typical embodiments, the shroud assembly **130** is coupled to the handle **120** and includes a shroud extension **131** and a shroud **132**. The shroud assembly **130** is typically coupled to the distal portion **122** of the handle **120** to protect the user's hand grasping the handle **120** from harsh elements such as wind, sleet, or ice, as shown in the FIG. 8. By way of example, the shroud extension **131** may be permanently coupled to the boat motor handle **120**. Alternatively, the shroud extension **131** is detachably coupled to the boat motor handle **120** with a coupling. Examples of the coupling may include a clip, a latch, a threaded insert, a lid, a snapping connector, a welded seam, or the like. As displayed in FIG. 2, the handle **120** may include a clip **123** that corresponds with the cavity **124** of the shroud extension **131**. To form a snap fit, the handle **120** may be pushed into the cavity **124** with sufficient force to mate the clip **123** of the handle **120** with the cavity **124** of the shroud extension. A sufficient pulling force may then be used to detach the shroud extension **131** from the handle **120**. In another embodiment, the shroud extension **131** may be rotatably coupled to the handle **120**, as depicted in FIG. 11. In this regard, the shroud extension **131** and the handle **120** are rotatable relative to each other about an axis of rotation.

Typically, the shroud extension **131** defines a length, a width, and a perimeter. In some embodiments, the width of the shroud extension **131** may be at least the width of the handle **120** as shown in FIGS. 1 through 10. In some other embodiments, the width of the shroud extension **131** may be less than the width of the handle **120**, as shown in FIGS. 11 and 12. Typically, the shroud extension **131** fits completely around the perimeter of the handle **120**. In some embodiments, the shroud extension **131** may fit partially around the perimeter of the handle **120** as shown in FIG. 6. In some other embodiments, the shroud extension **131** may include a cavity **131a** perpendicular to the length of the shroud extension **131**, as shown in FIGS. 7 through 9.

The shroud **132** is configured to protect the user's hand when grasping the handle **120** from harsh elements (e.g., by that disrupting wind and rain before they reach the user's hand). Accordingly, the shroud **132** defines a shape that is sufficient to protect the user's hand. For example, the shroud **132** may define a cone-like shape (e.g., as depicted in FIGS. 1 through 12). A shroud **132** having a cone-like shape may include a first perimeter **133** and a second perimeter **134** around the perimeter of the shroud extension **131**, as displayed in FIGS. 1 through 11, in which the first perimeter **133** is greater than the second perimeter **134**. By way of an alternative example, the shroud **132** may define a planar shape

(e.g., a triangular, rectangular, hexagonal, polygonal, elliptical, or circular plane) as depicted in FIG. 14.

The shroud **132** typically defines a stiff surface. Accordingly, the shroud **132** may be formed from a rigid (e.g., stiff) material, such as a metal, a metal alloy, plastic, plastic composite, carbon fiber, ceramic, or the like. Alternatively, the shroud **132** may be formed from a flexible material (e.g., a flexible polymeric material) that is capable of blocking wind and protecting a user's hands from harsh weather conditions. In some embodiments, the shroud **132** may be formed from a flexible material that can be collapsed on the surface of the shroud extension **131** as depicted in FIG. 13.

The shroud **132** is typically coupled to the shroud extension **131**. More typically, the shroud **132** is permanently coupled to the shroud extension **131** (e.g., as depicted in FIG. 1). As depicted in FIG. 14, the shroud **132** may be coupled to the shroud extension **131** via one or more rods **139**, which may also serve to support the shroud **132**.

Alternatively, the shroud **132** may be detachably coupled to the shroud extension **131**. As depicted in FIG. 3, the shroud **132** may be coupled to the shroud extension **131** using clips **126**. To form a snap fit, the shroud extension **131** may be pushed into a cavity **140** defined by the shroud **132** with sufficient force to mate the clip **126** of the shroud extension **131** with the cavity **140**. A sufficient pulling force may then be used to detach the shroud **132** from the shroud extension **131**.

The shroud **132** may be coupled to the shroud extension **131** so that the shroud **132** may partially surround the shroud extension **131** (e.g., partially extend along the length of shroud extension), as shown in FIG. 4. In some embodiments, the shroud **132** may fully extend along length of the shroud extension **131** with adequate space between proximal portion **121** of the handle **120** and the first perimeter **133** of the shroud **132** for user hand access, as shown in FIG. 5. Alternatively, the shroud **132** may not extend along the length of the shroud extension **131**, as shown in FIGS. 1 and 2.

In an alternative embodiment, the shroud assembly **130** may lack a shroud extension as shown in FIG. 10. In such an alternative embodiment, the shroud **132** may be directly coupled to the distal portion **122** of the handle **120** thereby eliminating the need for a shroud extension **131**.

In some embodiments, the shroud assembly **130** may be retractable. In this regard and as shown in FIG. 12 and FIG. 13, the handle **120** may include a cavity **150** into which the shroud assembly **130** may be retracted and stored when not in operation. As shown in FIG. 12, the length of the cavity **150** may be at least the length of the shroud extension **131**. The shroud **132** may be manually collapsed on the extension **131** and retracted into the cavity **150**. The shroud extension **131** may include a clip **136** that corresponds with a mate **137** in the cavity **150**. To form a snap fit, the shroud assembly **130** may be pushed into the cavity **150** with sufficient force to lock the clip **136** of the shroud extension with the mate **137** in the cavity **150**. In some embodiments, the shroud assembly **130** may be mechanized to collapse on the shroud extension **131** and retract into the cavity **150**. For example, as shown in FIG. 13, the handle **120** may include a motor **138** to collapse the shroud **132** on the shroud extension **131** and thereafter retract the shroud extension **131** into the cavity **150**. The motor **138** may further operate to extend a retracted shroud extension **131** from the cavity **150** and thereafter expand a collapsed shroud **132**.

While certain exemplary embodiments have been depicted and shown in the accompanying drawings, it is to be understood that such embodiments are merely illustrative and not restrictive on the broad invention, and that this invention not be limited to specific constructions and arrangements shown

and described, since various other changes, combinations, omissions, modifications and substitutions, in addition to those set forth in the above paragraphs, are possible. Those skilled in the art will appreciate that various adaptations, modifications, and combinations of the just described embodiments can be configured without departing from the scope and spirit of the invention. Therefore, it is to be understood that, within the scope of the appended claims, the invention may be practiced other than as specifically described herein.

Also, it will be understood that, where possible, any of the advantages, features, functions, devices, and/or operational aspects of any of the embodiments of the present invention described and/or contemplated herein may be included in any of the other embodiments of the present invention described and/or contemplated herein, or vice versa. In addition, where possible, any terms expressed in singular form herein are meant to also include the plural form and/or vice versa, unless explicitly stated otherwise. Accordingly, the terms “a” and/or “an” shall mean “one or more”.

What is claimed is:

1. A boat motor handling assembly comprising:
 - a housing comprising a boat motor;
 - a handle extending between first and second handle ends, wherein the first handle end is connected to the boat motor and the second handle end extends at a length from the housing of the boat motor, wherein the handle is configured to be grasped by a user to rotate the boat motor; and
 - a shroud assembly comprising:
 - a shroud extension comprising a body extending between first and second shroud extension ends, wherein the first shroud extension end is coupled proximate to the second handle end of the handle and extends at a length from the second handle end of the handle in a direction away from the housing; and
 - a shroud comprising a body extending between first and second shroud ends, wherein the first shroud end is coupled adjacent to the second shroud extension end and the body of the shroud extends along the body of the shroud extension in a direction toward the first shroud extension end, wherein the second shroud end of the shroud is spaced apart from the housing of the boat motor by the shroud extension to allow access to the handle by the user at a position between the second shroud end of the shroud and the housing.
2. The assembly of claim 1, wherein the second handle end of the handle defines a width and first shroud extension end of the shroud extension defines a whole with a width of at least the width of the handle.
3. The assembly of claim 1, wherein the first shroud extension end is permanently coupled to the handle.
4. The assembly of claim 1, wherein the first shroud extension end is detachably coupled to the handle.
5. The assembly of claim 1, wherein the first shroud extension end is rotatably coupled to the handle.
6. The assembly of claim 1, wherein the body of the shroud is conic in shape extending from a first diameter at the first shroud end to a second diameter at the second shroud end.
7. The assembly of claim 6, wherein the first diameter is less than the second diameter.
8. The assembly of claim 1, wherein the shroud is permanently coupled to the shroud extension.
9. The assembly of claim 1, wherein the shroud is detachably coupled to the shroud extension.
10. The assembly of claim 1, wherein the shroud is retractable.

11. The assembly of claim 1, wherein the shroud assembly is retractable into a cavity defined by the handle.

12. The assembly of claim 11, wherein the shroud assembly is mechanized with a motor to retract into the cavity defined by the handle.

13. The assembly of claim 1, wherein the shroud is collapsible.

14. The assembly of claim 13, wherein the shroud is collapsible on the surface defined by the shroud extension.

15. The assembly of claim 14, wherein the shroud is mechanized with a motor to collapse on the surface of the shroud extension.

16. The assembly of claim 1, wherein the shroud defines a stiff surface formed from a rigid material.

17. The assembly of claim 1, wherein the shroud comprises a flexible surface formed from a flexible material.

18. A boat motor assembly comprising:

- a boat motor;
- a housing defining a cavity, wherein the boat motor is positioned in the cavity, wherein the housing has a handle extending between first and second handle ends, wherein the first handle end is connected to the boat motor and the second handle end extends at length from the housing of the boat motor, wherein the handle is configured to be grasped by a user to rotate the boat motor;

a shroud assembly comprising;

- a shroud extension comprising a body extending between first and second shroud extension ends, wherein the first shroud extension end is detachably coupled proximate to the second handle end of the handle and extends at a length from the second handle end of the handle in a direction away from the housing; and
- a shroud comprising a body extending between first and second shroud ends, wherein the first shroud end is coupled adjacent to the second shroud extension end and the body of the shroud extends along the body of the shroud extension in a direction toward the first shroud extension end, wherein the second shroud end of the shroud is spaced apart from the housing of the boat motor by the shroud extension to allow access to the handle by the user at a position between the second shroud end of the shroud and the housing, wherein the shroud is conic in shape extending from a first diameter at the first shroud end to a second diameter at the second shroud end wherein the first diameter is less than the second diameter, the shroud defining a stiff surface formed from a rigid material.

19. A boat motor assembly comprising:

- a boat motor;
- a housing defining a cavity, wherein the boat motor is positioned in the cavity, wherein the housing comprises a handle comprising a body extending between first and second handle ends, wherein the first handle end is connected to the boat motor and the second handle end extends at a length in a direction away from the housing, the handle being configured to be grasped by a user to rotate the boat motor; and

a shroud comprising a body extending between first and second shroud ends, wherein the first shroud end is coupled adjacent to the second handle end located in a direction away from the boat motor and the body of the shroud extends along the body of the handle in a direction toward the first handle end and toward the boat motor, wherein the second shroud end of the shroud is spaced apart from the housing of the boat motor to allow

access to the handle by the user at a position between the second shroud end of the shroud and the housing, wherein the shroud is conic in shape extending from a first diameter at the first shroud end to a second diameter at the second shroud end wherein the first diameter is less than the second diameter, the shroud defining a stiff surface formed from a rigid material.

* * * * *